




«Prime-C» LLP  
 BIN 170940000095  
 100000, Republic of Kazakhstan, Karaganda, Erzhanova 18, BC «Respect», off. №817  
 IIC KZ06914052203KZ002W3 in "Sberbank" SB JSC  
 Phone: +7(7212)910-116; Mob.: +7(701)806-75-06, +7(775)700-30-30  
 e-mail: info@prime-c.kz

## DPL – In Duct Loose Tube Double Jacket Light Armor

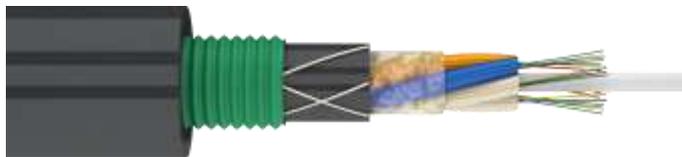

- 1. Outer sheath
- 2. Corrugated steel tape armor
- 3. Intermediate PE sheath
- 4. Hydrophobic gel
- 5. Core filler
- 6. Optical loose tube
- 7. Hydrophobic gel
- 8. Optical fiber
- 9. Central strength element

\* It is possible to produce a cable with flame-redundant outer sheath, with low smoke and gas emission (ng(A)-HF)

### Application

Optical cable is designed for installation in cable ducts, in pipes, in blocks, in trays, in tunnels, in headers, on bridges and skyways, between and inside buildings.

### Technical characteristics

Parameter	Value					
	Up to 24	Up to 48	Up to 64	Up to 72	Up to 96	Up to 144
Number of optical fibers	Up to 24	Up to 48	Up to 64	Up to 72	Up to 96	Up to 144
Tensile strength, kN	2,7					
Cable diameter, mm	11,6	12,4	13,7	13,0	13,7	14,6
Cable weight, kg/km	136,8	153,1	181,7	168,6	181,6	204,1
Bending radius, mm	174	186	206	195	205,5	219
Crushing force, kN/sm	0,3					
Operating temperature	-50°C...+70°C					
Installation temperature	-30°C...+50°C					
Transportation and storage temperature	-60°C...+70°C					
Minimum bending radius	Not less than 15 cable diameters					
Factory length, km	4					

### Technical characteristics of optical fiber

Type of optical fiber	Corning SMF 28 Ultra	Corning SMF28e+BB
ITU-T recommendations	G.657A1 G.652D	G.657A1 G.652D
Deviation from the concentricity of the core, microns, not more	0,5	
Diameter of fiber sheath, microns	125±0,7	
Deviation from the roundness of the sheath,%, not more	0,7	
The diameter of the protective covering, microns	242±5	
Maximum attenuation at wavelength 1310 nm	0,32	0,34
Maximum attenuation at wavelength 1550 nm	0,18	0,20

### Full name example

#### Optical cable DPL-P-48Y (6x8) 2,7kN

The cable consists of a loose tube core with a central strength element made of a dielectric rod around which optical loose tubes with freely laid fibers are twisted. The free space is filled with a hydrophobic gel in the optical loose tubes and in the core. The core is covered with intermediate MDPE sheath. The intermediate MDPE sheath is covered with the corrugated steel tape armor. Water blocking threads are laid between the intermediate sheath and the armor. The armor is covered with MDPE sheath.